




VIP ACCESSORIES

Remote control receiver

CLONIX

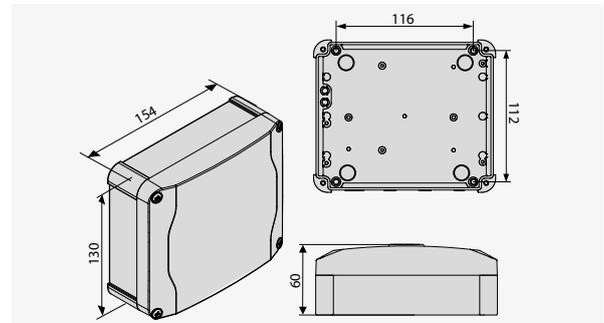

| | CLONIX 2E AC U-LINK 230 | CLONIX UNI AC U-LINK 230V | CLONIX 4 RTE | RTD 2048 | CLONIX 2E |
|--------------------------|-------------------------|---------------------------|--------------|----------|-----------|
| Motor power supply | 230 V | 230 V | | | |
| Environmental conditions | to 55 °C | from -20 °C to 55 °C | | | |
| Power supply | 230 V | 230 V | 230 V | 230 V | 24 V |

| | |
|---|---|
| <p>D113807 00002 - CLONIX 2E AC U-LINK 230 433MHz external receiver with 2 outputs with NO contact. Compatible with U-LINK protocol (with 3 connection slots). Power supply 230V, 2048-position memory</p> | <p>D113808 00003 - CLONIX UNI AC U-LINK 230V 433MHz external receiver with 3 outputs: 2 with NO contact and one NO/NC configurable. Compatible with U-LINK protocol (with 3 connection slots). Power supply 230V, 2048-position memory</p> |
| <p>D113718 00002 - CLONIX 4 RTE External 4-channel 433 MHz rolling code receiver. Power relay outputs (16A 230v)</p> | <p>D113670 00002 - RTD 2048 Four-channel rolling code receiver with 2048 codes and built-in programming display. 230Vac power supply, radio command block programming</p> |
| <p>D113674 00001 - CLONIX 2E External dual channel 433 MHz rolling code receiver. 128-position memory</p> | |

RECOMMENDED ACCESSORIES

| | |
|---|---|
| <p>P111532 - B EBA BLUE ENTRY ANDROID 8 BLUE-TOOTH expansion card for Blue Entry system. Manages up to 8 smartphones with the Android operating system</p> | <p>P111533 - B EBA BLUE ENTRY ANDROID 16 BLUE-TOOTH expansion card for Blue Entry system. Manages up to 16 smartphones with the Android operating system</p> |
| <p>D111904 - Mitto B Rcb02 R1 Transmitter with 2 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A</p> | <p>D111906 - Mitto B Rcb04 R1 Transmitter with 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A</p> |
| <p>P111531 - B EBA BLUE ENTRY ANDROID 4 BLUE-TOOTH expansion card for Blue Entry system. Manages up to 4 smartphones with the Android operating system</p> | <p>P111468 - B EBA RS 485 LINK Expansion board for connection of central units with serial controls management</p> |



| | | | |
|--|--|---|--|
|  | <p>P111535 - BEBA Z-WAVE DRIVER</p> <p>Expansion card for connection with Z-Wave wireless protocol</p> |  | <p>P111523 - U-BASE 2 ANDROID</p> <p>BFT receiver and control unit management and programming software. Version for Android mobile device, Bluetooth connection</p> |
|  | <p>P111510 - U-Base 2 PC</p> <p>Management and programming software for Bft control units and receivers. Version for PC, Bluetooth connection</p> | | |



Complete Systems P. 248



accessories P. 238


| | | | |
|------------------------------------|--------|---|--------|
| control units | P. 230 | activation sensors automatic doors and security | P. 242 |
| accessories for control units | P. 238 | signalling devices | P. 243 |
| set of batteries for control units | P. 238 | safety devices - Photocells and accessories | P. 243 |
| expansion boards | P. 239 | safety devices - Sensitive edges | P. 245 |
| software | P. 240 | rubber profiles | P. 245 |
| receivers | P. 240 | solenoid locks | P. 246 |
| transmitters | P. 241 | release systems | P. 246 |
| control devices | P. 241 | | |



Remote control receiver

MIME

Miniaturized 2-channel indoor receiver for wireless control of lights or operators

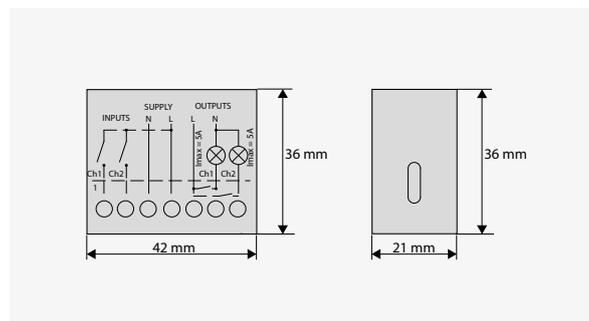

| MIME | |
|--------------------------|----------------------|
| Power supply | 230 V |
| Environmental conditions | from -20 °C to 40 °C |
| Built-in antenna | yes |

| | |
|---|--|
|  <p>D113824 - MIME AC Récepteur bicanal à usage interne 433MHz, 2 independent outputs 230 Vac power supply 30-position memory Operating mode: monostable, bistable, timed, motor control</p> |  <p>R400005 - KIT MIME AC Récepteur bicanal à usage interne 433MHz, 2 independent outputs 230 Vac power supply 30-position memory Operating mode: monostable, bistable, timed, motor control Complete with 1 MITTO 4 Clear Ice remote control</p> |
|  <p>R400008 - KIT MIME AC PAD NEW Récepteur bicanal à usage interne 433MHz, 2 independent outputs 230 Vac power supply 30-position memory Operating mode: monostable, bistable, timed, motor control Complete with 1 MITTO 4 Clear Ice remote control</p> | |

RECOMMENDED ACCESSORIES


| | |
|---|---|
|  <p>D111904 - Mitto B Rcb02 R1 Transmitter with 2 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A</p> |  <p>D111906 - Mitto B Rcb04 R1 Transmitter with 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A</p> |
|  <p>D111947 - MITTO B RCB04 R1 CLEAR ICE Transmitter 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A. Colour: Clear Ice White</p> |  <p>D111946 - MITTO B RCB04 R1 SUNRISE Transmitter 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A. Colour: Sunrise Yellow</p> |
|  <p>D111945 - MITTO B RCB04 R1 VINEYARD Transmitter 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A. Colour: Vineyard Red</p> |  <p>N999522 - CLIP B 00 R04 Wall mounting clip for KLEIO B RCA and MITTO B RCB remote controls. 30 unit pack</p> |
|  <p>P121016 - RB 4-in-1 4-channel wall-mounted radio control with rolling code</p> |  <p>P121024 - Q.BO TOUCH Wireless digital touchpad with 433MHz rolling code operation. Manages up to 10 channels and 100 codes.</p> |



Flashing lights for automatic gates

IPNOS

Flashing light with LED technology and incorporated receiver antenna. New design language with tinted cap.

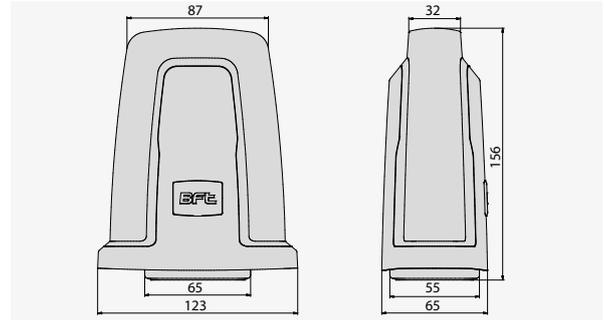

| | IPNOS |
|--------------------------------|-------|
| Environmental conditions (min) | -20 ° |
| Environmental conditions (max) | 60 ° |
| Protection rating | IP44 |

| | | |
|--|---|--|
|  | D113783 - IPNOS B LTB 24 R1 | |
| | Flashing light with LED technology and built-in receiver antenna. New design language with smoke-grey cover. Power supply 24 V ac/dc. | |

RECOMMENDED ACCESSORIES

| | | | |
|---|---------------------------|---|---|
|  | P123026 - B 00 R01 |  | P123025 - B 00 R02 |
| | Metal guard for B LTA | | Wall mounting for B LTA series flashing beacons |

VIP ACCESSORIES

| | | | | |
|---|---|---|---|--|
|  |  |  | control units P. 230 | activation sensors automatic doors and security P. 242 |
| | Complete Systems P. 248 | | accessories for control units P. 238 | signalling devices P. 243 |
| | | | set of batteries for control units P. 238 | safety devices - Photocells and accessories P. 243 |
| | | | expansion boards P. 239 | safety devices - Sensitive edges P. 245 |
| | | | software P. 240 | rubber profiles P. 245 |
| | | | receivers P. 240 | solenoid locks P. 246 |
| | | | transmitters P. 241 | release systems P. 246 |
| | | | control devices P. 241 | |


 phase out



Flashing lights for automatic gates

RADIUS

Range of flashing lights, 24V or 230V, with or without integrated antenna

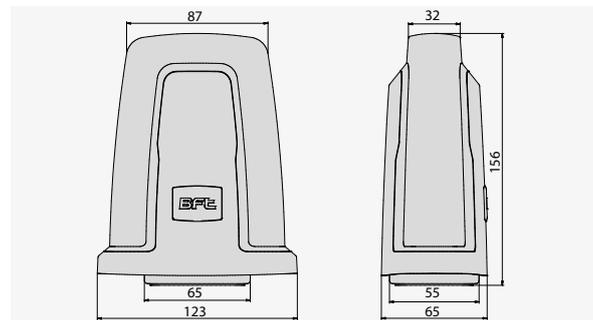

| RADIUS | | | | |
|--------------------------------|-------|-------|-------|-------|
| Environmental conditions (min) | -20 ° | -20 ° | -20 ° | -20 ° |
| Environmental conditions (max) | 60 ° | 60 ° | 60 ° | 60 ° |
| Protection rating | IP44 | | | |

| | | | |
|---|--|---|--|
|  | D113748 00003 - RADIUS B LTA 24 R1 Flashing light with incorporated antenna for motors with power supply 24 V. |  | D113749 00003 - RADIUS B LTA 24 R2 Flashing light without incorporated antenna for motors with power supply . |
|  | D113748 00002 - RADIUS B LTA 230 R1 Flashing light with incorporated antenna for motors with power supply 230 V. |  | D113749 00002 - RADIUS B LTA 230 R2 Flashing light without incorporated antenna for motors with power supply . |


RECOMMENDED ACCESSORIES

| | | | |
|---|--|---|--|
|  | P123026 - B 00 R01 Metal guard for B LTA |  | P123025 - B 00 R02 Wall mounting for B LTA series flashing beacons |
|---|--|---|--|

Remote controls for automatic gates

KLEIO

Complete range of remote controls, 433MHz rolling code. Available with 2 or 4 channels. Softtouch finishes.

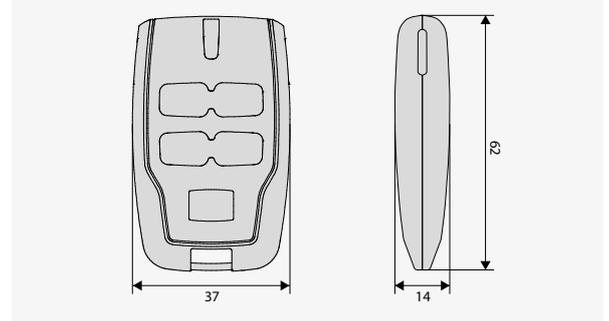

| | | KLEIO | |
|---------------------|----------|-------|----------|
| Voltage | 12 V | | 12 V |
| Number of batteries | 1 | | 1 |
| Battery type | 23 A | | 23 A |
| Range | 50/100 m | | 50/100 m |

| | | | |
|--|--|--|--|
| | D111888 - Kleio B Rca02 R1 Transmitter with 2 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A | | D111890 - Kleio B Rca04 R1 Transmitter with 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A |
|--|--|--|--|

RECOMMENDED ACCESSORIES

| | | | |
|--|---|--|---|
| | D113807 00002 - CLONIX 2E AC U-LINK 230 433MHz external receiver with 2 outputs with NO contact. Compatible with U-LINK protocol (with 3 connection slots). Power supply 230V, 2048-position memory | | D113808 00003 - CLONIX UNI AC U-LINK 230V 433MHz external receiver with 3 outputs: 2 with NO contact and one NO/NC configurable. Compatible with U-LINK protocol (with 3 connection slots). Power supply 230V, 2048-position memory |
| | D113674 00001 - CLONIX 2E External dual channel 433 MHz rolling code receiver. 128-position memory | | D113718 00002 - CLONIX 4 RTE External 4-channel 433 MHz rolling code receiver. Power relay outputs (16A 230v) |
| | P111510 - U-Base 2 PC Management and programming software for Bft control units and receivers. Version for PC. Bluetooth connection | | P111529 - U-PROG Programmer for radio control units and receivers with possibility of wired or BlueTooth connection |
| | N999522 - CLIP B 00 R04 Wall mounting clip for KLEIO B RCA and MITTO B RCB remote controls. 30 unit pack | | N999521 - CLIP1 B 00 R03 Clip for hooking KLEIO B RCA and MITTO B RCB series remote controls to belt or sun visor. Supplied in pack of 30pcs |

VIP ACCESSORIES


| | | | | |
|--|-------------------------|--------------------|---|--|
| | | | control units P. 230 | activation sensors automatic doors and security P. 242 |
| | Complete Systems P. 248 | accessories P. 238 | accessories for control units P. 238 | signalling devices P. 243 |
| | | | set of batteries for control units P. 238 | safety devices - Photocells and accessories P. 243 |
| | | | expansion boards P. 239 | safety devices - Sensitive edges P. 245 |
| | | | software P. 240 | rubber profiles P. 245 |
| | | | receivers P. 240 | solenoid locks P. 246 |
| | | | transmitters P. 241 | release systems P. 246 |
| | | | control devices P. 241 | |



Remote controls for automatic gates

MITTO

Complete range of remote controls, 433MHz rolling code. Available with 2 or 4 channels.

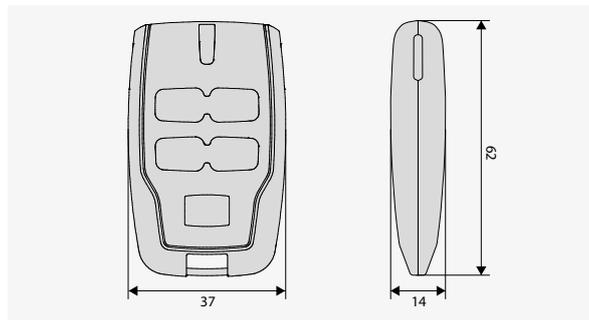

| | MITTO | | | | | | | | | |
|---------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Voltage | 12 V |
| Number of batteries | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Battery type | 23 A |
| Range | 50/100 m |

| | | | |
|--|---|---|--|
|  | D111904 - Mitto B Rcb02 R1 Transmitter with 2 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A |  | D111905 - MITTO B RCB02 R2 REPLAY Copyable transmitter 2 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A. |
|  | N999542 - Mitto B Rcb02 R3 12V two-channel transmitter 433MHz rolling code. Pack of 100 items, numbered for block memorisation |  | D111906 - Mitto B Rcb04 R1 Transmitter with 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A |
|  | D111907 - MITTO B RCB04 R2 REPLAY Copyable transmitter 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A. |  | N999543 - Mitto B Rcb04 R3 Transmitter 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A. Pack of 100pcs numbered for block memorisation. |
|  | N999629 - MITTO B RCB04 R6 RAINBOW Pack of four MITTO 4 transmitters in the four BFT colours: vineyard red sunrise yellow clear ice white deep sea blue |  | D111945 - MITTO B RCB04 R1 VINEYARD Transmitter 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A. Colour: Vineyard Red |
|  | D111946 - MITTO B RCB04 R1 SUNRISE Transmitter 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A. Colour: Sunrise Yellow |  | D111947 - MITTO B RCB04 R1 CLEAR ICE Transmitter 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A. Colour: Clear Ice White |

RECOMMENDED ACCESSORIES

| | | | |
|--|--|---|---|
|  | D113807 00002 - CLONIX 2E AC U-LINK 230V 433MHz external receiver with 2 outputs with NO contact. Compatible with U-LINK protocol (with 3 connection slots). Power supply 230V, 2048-position memory |  | D113808 00003 - CLONIX UNI AC U-LINK 230V 433MHz external receiver with 3 outputs: 2 with NO contact and one NO/NC configurable. Compatible with U-LINK protocol (with 3 connection slots). Power supply 230V, 2048-position memory |
|--|--|---|---|



| | | | |
|--|--|--|---|
| | <p>D113718 00002 - CLONIX 4 RTE</p> <p>External 4-channel 433 MHz rolling code receiver. Power relay outputs (16A 230v)</p> | | <p>D113674 00001 - CLONIX 2E</p> <p>External dual channel 433 MHz rolling code receiver. 128-position memory</p> |
| | <p>P111510 - U-Base 2 PC</p> <p>Management and programming software for Bft control units and receivers. Version for PC, Bluetooth connection</p> | | <p>P111529 - U-PROG</p> <p>Programmer for radio control units and receivers with possibility of wired or BlueTooth connection</p> |
| | <p>N999522 - CLIP B 00 R04</p> <p>Wall mounting clip for KLEIO B RCA and MITTO B RCB remote controls. 30 unit pack</p> | | <p>N999521 - CLIP1 B 00 R03</p> <p>Clip for hooking KLEIO B RCA and MITTO B RCB series remote controls to belt or sun visor. Supplied in pack of 30pcs</p> |



| | |
|------------------------------------|--------|
| control units | P. 230 |
| accessories for control units | P. 238 |
| set of batteries for control units | P. 238 |
| expansion boards | P. 239 |
| software | P. 240 |
| receivers | P. 240 |
| transmitters | P. 241 |
| control devices | P. 241 |


| | |
|---|--------|
| activation sensors automatic doors and security | P. 242 |
| signalling devices | P. 243 |
| safety devices - Photocells and accessories | P. 243 |
| safety devices - Sensitive edges | P. 245 |
| rubber profiles | P. 245 |
| solenoid locks | P. 246 |
| release systems | P. 246 |



Switches for automatic gates, entrances and electric appliances

Q.BO

Range of selectors for the control of access points and/or electric users.

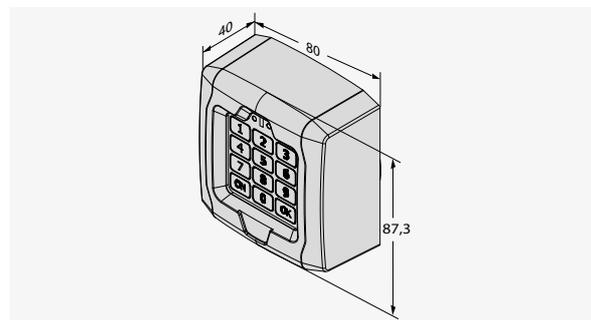

| | Q.BO TOUCH | Q.BO KEY WM | Q.BO KEY WM AV | Q.BO PAD |
|--------------------------------|------------|-------------|----------------|----------|
| Voltage | | | | 12/24 V |
| Number of batteries | 2 | | | |
| Battery type | cr123a A | | | |
| Environmental conditions (min) | -10 ° | -20 ° | -20 ° | -10 ° |
| Environmental conditions (max) | 55 ° | 60 ° | 60 ° | 55 ° |
| Protection rating | IP55 | | IP44 | |



P121024 - **Q.BO TOUCH**

Wireless digital touchpad with 433MHz rolling code operation. Manages up to 10 channels and 100 codes.



P121022 - **Q.BO KEY WM**

Key selector for outdoor use with double contact.



P121023 - **Q.BO KEY WM AV**

Vandalproof key selector with double contact, for outdoor use. Metal structure. Vandalproof key selector with metal structure.



P121025 - **Q.BO PAD**

Vandalproof outdoor digital button panel. Metal structure and s/steel buttons. Compatible with WIEGAND protocol, it ensures maximum system safety as it does not directly control gate opening.

RECOMMENDED ACCESSORIES



P111467 - **B EBA WIE DRIVER**

Expansion card for connection of WIEGAND accessories, compatible with U-Link control units



P111408 - **SCS WIE**

Board for connection of SELETTO (E) push-button panel and COMPASS SLIM proximity reader Until stocks last



P903026 - **PHP3**

Pair of aluminium columns for Q.bo series selectors. Height 1038 mm



D113674 00001 - **CLONIX 2E**

External dual channel 433 MHz rolling code receiver. 128-position memory



D113718 00002 - **CLONIX 4 RTE**


External 4-channel 433 MHz rolling code receiver. Power relay outputs (16A 230v)



Photocells for automatic gates and safety devices

THEA

Pair of orientable photocells with integrated flashing beacon

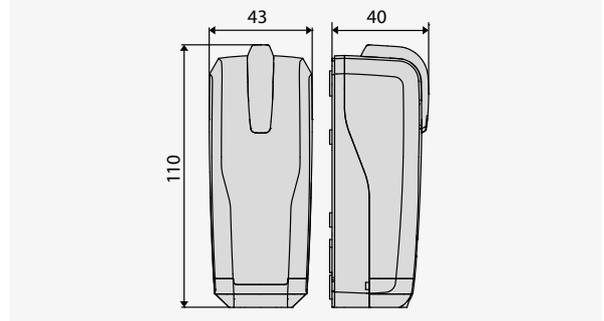

| | | THEA | |
|-------------------|------|------|------|
| Voltage | | 24 V | 24 V |
| Horiz. adjustment | | 40 ° | 40 ° |
| Vert. adjustment | | 10 ° | 10 ° |
| Range | | 30 m | 30 m |
| Protection rating | IP55 | | |

| | | | |
|---|---|---|---|
|  | P111528 - THEA A15 O.PF Pair of adjustable photocells with integrated flashing light. Possibility of directing the beam 40 ° horizontally and 10 ° vertically. IR signal synchronised to prevent any risk of blinding. Range 30 m. Power supply 24 V ac/dc. For external application. |  | P111714 - THEA A15 O.PF UNI Pair of universal photocells suitable for non-BFT automation systems, adjustable with integrated flashing light. Beam can be oriented 40° horizontally and 10° vertically. Synchronised infrared signal to avoid any possibility of accidental dazzling. Range 30 m. Power supply 24 V ac/dc. For external application. |
|---|---|---|---|

RECOMMENDED ACCESSORIES

| | | | |
|---|---|---|---|
|  | P903022 - PHP BI Dual-face adapter for THEA/DESME photocells |  | P903018 - PHP Pair of aluminium posts for THEA/DESME series photocells Height 522 mm |
|  | P903019 - PHP2 Pair of double aluminium posts for THEA/DESME series photocells. Height 1038 mm |  | P903021 - PHP ADA CC Pair of adapters for the installation of THEA/DESME photocells on CC posts |
|  | P903023 - PHP BA1 Support for mounting THEA/DESME photocells on Giotto, Moovi and Michelangelo enclosures |  | P903020 - APL Pair of foundation plates for PHP posts |

VIP ACCESSORIES

| | | | | |
|---|---|---|---|--|
|  |  |  | control units P. 230 | activation sensors automatic doors and security P. 242 |
| | Complete Systems P. 248 | | accessories for control units P. 238 | signalling devices P. 243 |
| | | | set of batteries for control units P. 238 | safety devices - Photocells and accessories P. 243 |
| | | | expansion boards P. 239 | safety devices - Sensitive edges P. 245 |
| | | | software P. 240 | rubber profiles P. 245 |
| | | | receivers P. 240 | solenoid locks P. 246 |
| | | | transmitters P. 241 | release systems P. 246 |
| | | | control devices P. 241 | |


phase out



Photocells for automatic gates and safety devices

DESME

Design, innovation and technology. These are the messages conveyed by the new range of photocells, which perfectly combine elegance, practicality, safety, ergonomics and functionality. The range includes adjustable and fixed photocells to cover every installation requirement.

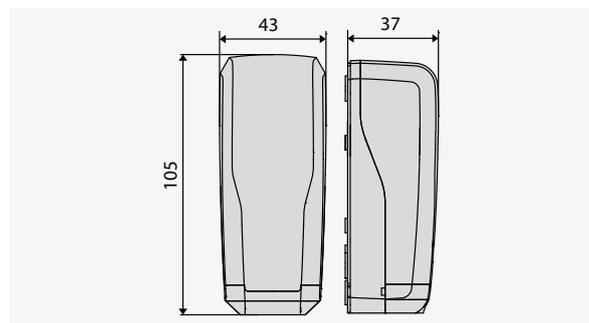

| | DESME A15 | DESME A15 O |
|-------------------|-----------|-------------|
| Voltage | 24 V | 24 V |
| Horiz. adjustment | | 40 ° |
| Vert. adjustment | | 10 ° |
| Range | 30 m | 30 m |
| Protection rating | IP55 | |

| | |
|--|--|
|  P111526 - DESME A15 Pair of self-aligning photocells. Range 30 m. Power supply 24 V ac/dc. |  P111527 - DESME A15 O Pair of photocells adjustable 40 ° horizontally and 10 ° vertically. IR signal synchronised to prevent any risk of blinding. Range 30 m. Power supply 24 V ac/dc. |
|--|--|


RECOMMENDED ACCESSORIES

| | |
|---|---|
|  P903018 - PHP Pair of aluminium posts for THEA/DESME series photocells. Height 522 mm. |  P903019 - PHP2 Pair of double aluminium posts for THEA/DESME series photocells. Height 1038 mm. |
|  P903021 - PHP ADA CC Pair of adapters for the installation of THEA/DESME photocells on CC posts. |  P903022 - PHP BI Dual-face adapter for THEA/DESME photocells. |
|  P903023 - PHP BA1 Support for mounting THEA/DESME photocells on Giotto, Moovi and Michelangelo enclosures. |  P903024 - ACV20 Vandal-proof protection for DESME photocells. |
|  P903020 - APL Pair of foundation plates for PHP posts. | |

Photocells for automatic gates and safety devices

AKTA - ERIS

Wired or wireless adjustable photocells with maximum range 30 m.

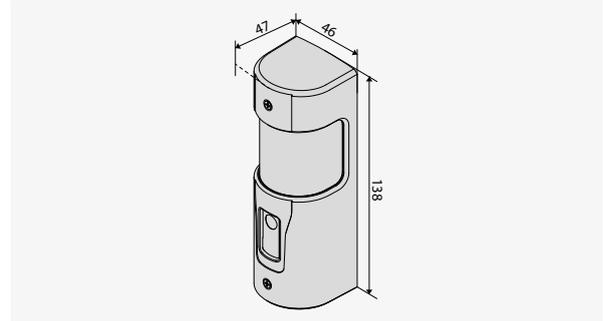

| AKTA - ERIS | | | |
|-------------------|-------|--|-------|
| Voltage | 24 V | | 24 V |
| Horiz. adjustment | 180 ° | | 180 ° |
| Vert. adjustment | 20 ° | | 20 ° |
| Range | 30 m | | 30 m |
| Protection rating | IP55 | | |

| | | | |
|--|---|--|---|
| | P111536 - AKTA A30 Pair of photocells adjustable 180 ° horizontally and 20 ° vertically. Range 30 m. Power supply 24 V ac/dc. | | P111537 - ERIS A30 Pair of wireless photocells with possibility of management of an active infrared or resistive safety edge adding STR and BIR C or BAR C profiles. Possibility of adjusting the beam 180 ° horizontally and vertically 20 °. Range 30 m. Power supply 24 V ac/dc. |
|--|---|--|---|

RECOMMENDED ACCESSORIES

| | | | |
|--|--|--|--|
| | N190106 - STR Pair of infrared STR sensors for ERIS A30 | | N190104 - BIR C Rubber safety edge (H 30 mm), price per m |
| | P111451 00002 - BAR C BA 2 Double profile rubber safety edge with lip seals (L 2000 x H 60 mm) | | P903025 - PHP ADA Pair of adapters for the installation of AKTA photocells on PHP posts |
| | P903018 - PHP Pair of aluminium posts for THEA/DESME series photocells Height 522 mm | | P903019 - PHP2 Pair of double aluminium posts for THEA/DESME series photocells. Height 1038 mm |
| | P903020 - APL Pair of foundation plates for PHP posts | | P111538 - ACV30 Vandal-proof protection for AKTA photocells |
| | N999465 - DCW BAT Pack of 12 batteries for photocell safety edge, compatible with DCW, TANGO, ERIS A30 | | |

| | | | | |
|--|--|--|--|---|
| | | | control units P. 230 accessories for control units P. 238 set of batteries for control units P. 238 expansion boards P. 239 software P. 240 receivers P. 240 transmitters P. 241 control devices P. 241 | activation sensors automatic doors and security P. 242 signalling devices P. 243 safety devices - Photocells and accessories P. 243 safety devices - Sensitive edges P. 245 rubber profiles P. 245 solenoid locks P. 246 release systems P. 246 |
|--|--|--|--|---|



THALIA



Control panel with display for one or two hinged door operators, 24V - 300+300W.

| | | | |
|--|--|--|---|
| | <p>D113747 00002 - THALIA P</p> <p>Control panel for one or two 24V electromechanical and hydraulic operators for swing gates with electric lock management, for highly complex systems</p> | | <p>D113747 00001 - THALIA P 120V</p> <p>Control panel for one or two 24V electromechanical and hydraulic operators for swing gates with electric lock management, for highly complex systems</p> |
| | <p>D113745 00002 - THALIA</p> <p>Control panel with display for one or two 24V electromechanical operators for swing gates</p> | | |

Rigel



Universal control board with display for one or two swing or sliding door operators, 230V - 650+650W.

Main features: removable terminal blocks, programming and diagnostics with display, built-in four-channel receiver, electro lock, electronic torque limiter, electronic deceleration at opening and closing, a separate limit switch inputs for each motor, traffic light management, preheating hydraulic operators, weekly timer, possibility to delete a specific remote control, customization of the 4 radio channels, personalization of the duration of the delayed output, adjustable sensitivity to the obstacle.

| | | | |
|--|---|--|--|
| | <p>D113833 00002 - RIGEL 6 220-230V 50/60HZ new</p> <p>Universal control panel with display for one or two 230V - 650+650W operators</p> | | <p>D113833 00001 - RIGEL 6 110-120V 50/60HZ new</p> <p>Universal control panel with display for one or two 120V operators</p> |
|--|---|--|--|


Alcor



Control panel with dip switches and potentiometers for one or two 230V/300W operators for swing gates

| | | | |
|--|--|--|--|
| | <p>D113706 00002 - ALCOR N</p> <p>Control panel with dip switches and potentiometers for one or two 230V/300W operators for swing gates</p> | | <p>D113706 00003 - ALCOR N SD 120V</p> <p>ALCOR N SD 120V</p> |
|--|--|--|--|

Leo

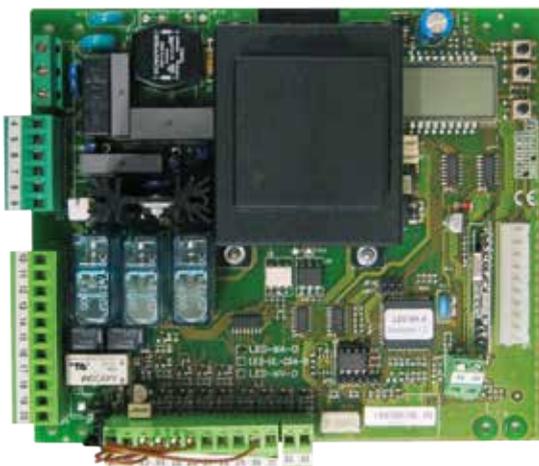

Control panel with display for one operator, 230V - 750W, with possibility of input enabling for BFT encoder.

| | | | |
|--|--|--|--|
| | <p>D113695 00002 - LEO D MA</p> <p>Control panel with display for one operator, 230V - 750W, with possibility of input enabling for BFT encoder.</p> | | <p>D113767 00002 - Leo b Cbb L01</p> <p>Control board for PEGASO CJA single phase operators</p> |
| | <p>D113768 00002 - Leo B Cbb W01</p> <p>Application: control unit for 1 Pegaso B Cja series three-phase operator Board power supply: 400V three-phase Operator power supply: 400V three-phase</p> | | <p>D113777 00002 - LEO B CBB L02</p> <p>Incorporated control unit for one 230V operator for sliding gates</p> |

| | | | | |
|------------|--------------------------------|---------------------------|---|--|
| <p>new</p> | <p>Complete Systems P. 248</p> | <p>accessories P. 238</p> | <p>control units P. 230 accessories for control units P. 238 set of batteries for control units P. 238 expansion boards P. 239 software P. 240 receivers P. 240 transmitters P. 241 control devices P. 241</p> | <p>activation sensors automatic doors and security P. 242 signalling devices P. 243 safety devices - Photocells and accessories P. 243 safety devices - Sensitive edges P. 245 rubber profiles P. 245 solenoid locks P. 246 release systems P. 246</p> |
|------------|--------------------------------|---------------------------|---|--|



Alena



Control panel with dip switches and potentiometers for one or two 230V operators for swing gates and industrial folding doors



D113811 00002 - **ALENA ACL2**

Control panel with dip switches and potentiometers for one or two 230V/300W operators for swing gates and industrial folding doors



D113811 00004 - **ALENA SW2**

Control panel with dip switches and potentiometers for one or two 230V 400W+400W, operators for swing gates and industrial folding doors . It can manage slow down.

Altair



Control panel with display for one or two 230V/300W operators for swing gates and industrial folding doors



D113703 00002 - **ALTAIR P**

Control panel with display for one or two 230V/300W operators for swing gates and industrial folding doors

ELBA

Control panel, max 230V, for roller shutters or roll-up doors



| | | | |
|--|---|--|--|
| | <p>D113716 00002 - ELBA</p> <p>Control panel, max 230V, for roller shutters or roll-up doors</p> | | <p>D113717 00002 - ELBA BU</p> <p>Control panel, max 230V, for roller shutters or roll-up doors</p> |
|--|---|--|--|

Perseo

Universal control panel for one or two 230V operators.



| | | | |
|--|---|--|--|
| | <p>D113812 00002 - PERSEO CBE 230.P SD</p> <p>Control unit with U-Link, receiver and incorporated heating circuit (to -40°C) for electro-mechanical and hydraulic bollards. Can manage up to 4 bollards at the same time (or up to 2 Xpass 1200)</p> | | |
|--|---|--|--|

new

phase out

Complete Systems P. 248

accessories P. 238

control units P. 230
 accessories for control units P. 238
 set of batteries for control units P. 238
 expansion boards P. 239
 software P. 240
 receivers P. 240
 transmitters P. 241
 control devices P. 241


activation sensors automatic doors and security P. 242
 signalling devices P. 243
 safety devices - Photocells and accessories P. 243
 safety devices - Sensitive edges P. 245
 rubber profiles P. 245
 solenoid locks P. 246
 release systems P. 246



LIBRA



Control panel for one or two swing gate operators.

| | | | |
|---|--|---|---|
|  | <p>D113715 00002 - LIBRA C LX Q5G2 Control panel for one or two LUX BT series operators</p> |  | <p>D113672 00005 - LIBRA C MA Control panel for one or two 24V swing gate operators.</p> |
|  | <p>D113742 00002 - LIBRA CB HIDE Control panel with display for 1 or 2 HIDE SW series operators</p> | | |

Shedir

Routing centralisation card for controlling up to two motors or groups of motors in single mode or centralised.



| | | | |
|--|---|--|--|
|  | <p>P111515 - Shedir B Cbc 02 L01 Control unit for wired centralisation. For 2 operators (or 2 groups of operators)</p> | | |
|--|---|--|--|

Zara



Control panel with dip switches and potentiometers for one or two 24V operators for swing gates



D113796 00002 - ZARA BT L2

Control panel with dip switches and potentiometers for one or two 24V operators for swing gates

Shyra



Control panel for DEIMOS AC sliding gate operator range.



VEGA

Control panel for one or two overhead garage door operators.



D113836 00002 - VEGA QUADRO QSG ^{new}

HYDRA N control board in CPEL panel

HYDRA

Control panel for one or two overhead garage door operators



D113730 00002 - HYDRA N CPEL ^{Ph Out}

HYDRA N control board in CPEL panel



PROXIMA



P111465 - PROXIMA BLUE

Universal handheld programmer for control units, receivers and remote controls with BLUETOOTH technology



P111326 - PROXIMA

Universal handheld programmer for control units, receivers and remote controls



Complete Systems P. 248



accessories P. 238

| | |
|------------------------------------|--------|
| control units | P. 230 |
| accessories for control units | P. 238 |
| set of batteries for control units | P. 238 |
| expansion boards | P. 239 |
| software | P. 240 |
| receivers | P. 240 |
| transmitters | P. 241 |
| control devices | P. 241 |

| | |
|---|--------|
| activation sensors automatic doors and security | P. 242 |
| signalling devices | P. 243 |
| safety devices - Photocells and accessories | P. 243 |
| safety devices - Sensitive edges | P. 245 |
| rubber profiles | P. 245 |
| solenoid locks | P. 246 |
| release systems | P. 246 |



General accessories

Accessories for control units

| | | | |
|---|--|---|--|
|  | D223066 - CPEM Control panel box for control units. Dimensions 235x193mm depth 100mm |  | D223072 - CPEL Large control panel box for control units. Dimensions 315x218mm depth 120mm |
|  | D223050 - SD BOX SD BOX WITH 2 HOLES DIA. 38 |  | D223040 - QSG2 QSG2 ENCLOSURE 8.5x12x5" |
|  | N999070 - SFQ Set of SD and QSG panel fixing brackets |  | N999369 - CP SD Set of cable clamps for SD panel |

Set of batteries for control units

| | | | |
|--|--|---|---|
|  | P111503 - BBV SLC TL Battery powered anti-panic device for VISTA SL C, TL |  | P120074 - GIOTTO M BG BAT KIT new Buffer battery kit for Giotto BT A series barrier |
|  | P125033 - SL BAT1 Ph Out SL BAT1 emergency battery kit for DEIMOS ULTRA BT |  | P125035 - SL BAT2 Emergency battery kit for Deimos BT A, Ares BT A, Deimos Ultra BT A, Ares Ultra BT A. |
|  | P125002 - SB BAT SB BAT emergency battery kit for DEIMOS BT |  | P125009 - BT BAT2 Set of backup batteries for ARES |
|  | P125005 - BT BAT Set of backup batteries for LIBRA C MA, LIBRA C LX, HYDRA N, ARGO |  | P125020 - BBT BAT Set of backup batteries for THALIA and THALIA P |
|  | P125008 - VIRGO BAT Set of backup batteries for VIRGO |  | P120017 - BAT KIT 1 Ph Out Set of backup batteries for GIOTTO series barriers. Not compatible with GIOTTO BT A |
|  | P125038 - MCL BT A BAT KIT Set of backup batteries for MICHELANGELO BT A barriers |  | P111768 - BBV BATT MODULO VISTA SL new Set of backup batteries for VISTA SL |
|  | P975005 - BATT-EB new Backup battery kit to allow bollards to stay up in case of no power |  | P125007 - BT BAT1 Emergency battery kit for HYDRA N CPEL, only for external board not compatible with board on motor |

| | | | |
|--|--|--|--|
| | <p>P125006 - CB E05</p> <p>Set of backup batteries for VENERE D</p> | | |
|--|--|--|--|

Expansion boards

| | | | |
|--|--|--|--|
| | <p>P111531 - B EBA BLUE ENTRY ANDROID 4</p> <p>BLUE-TOOTH expansion card for Blue Entry system. Manages up to 4 smartphones with the Android operating system</p> | | <p>P111532 - B EBA BLUE ENTRY ANDROID 8</p> <p>BLUE-TOOTH expansion card for Blue Entry system. Manages up to 8 smartphones with the Android operating system</p> |
| | <p>P111533 - B EBA BLUE ENTRY ANDROID 16</p> <p>BLUE-TOOTH expansion card for Blue Entry system. Manages up to 16 smartphones with the Android operating system</p> | | <p>P111468 - B EBA RS 485 LINK</p> <p>Expansion board for connection of central units with serial controls management</p> |
| | <p>P111466 - B EBA IO DRIVER</p> <p>INPUT/OUTPUT expansion board</p> | | <p>P111467 - B EBA WIE DRIVER</p> <p>Expansion card for connection of WIEGAND accessories, compatible with U-Link control units</p> |
| | <p>P111469 - B EBA BLUE GATEWAY</p> <p>Expansion board for BLUETOOTH connection management</p> | | <p>D113805 00002 - B EBA TCP/IP GATEWAY</p> <p>Remote management of automation systems with U-Link in TCP/IP network.</p> |
| | <p>P111535 - BEBA Z-WAVE DRIVER</p> <p>Expansion card for connection with Z-Wave wireless protocol</p> | | <p>D113727 - TLB</p> <p>Traffic-light management board for THALIA, THALIA P and LEO CBB.</p> |
| | <p>P111449 - RAU</p> <p>Wired connection board for BFT plug-in receivers</p> | | <p>P111400 - FLC BK2</p> <p>Interface for connecting one or more BK2 type edges</p> |
| | <p>P111399 - IT23</p> <p>Connection interface for CELLULA RFL in accordance with EN12453 Standard</p> | | <p>D111013 - ME</p> <p>Control board for 12Vac solenoid lock for 230V automation systems</p> |
| | <p>D111501 - ME110</p> <p>ME110 12V</p> | | <p>D111761 - ME BT</p> <p>Control board for 24Vac solenoid lock for 24V automation systems</p> |
| | <p>D113050 - SPL</p> <p>Pre-heating board with thermostat for 230V hydraulic operators. Not usable with RIGEL 5</p> | | <p>D111704 - SSR5</p> <p>Traffic light or preheating management card (one function excludes the other) 230V hydraulic motors for RIGEL5</p> |
| | <p>D111061 - SS</p> <p>Gate open indicator board for ALCOR N and ALPHA (operation with limit switch)</p> | | <p>P111376 - SCS 1</p> <p>Serial board for connection to zone and opposing leaves for control units with display While stocks last</p> |
| | <p>P111377 - SCS 1 MA</p> <p>Board for connection to more than two checked photocell copies for DEIMOS BT and ARES</p> | | <p>P111408 - SCS WIE</p> <p>Board for connection of SELETTO (E) push-button panel and COMPASS SLIM proximity reader Until stocks last</p> |

new
new

Ph. Out
phase out

Complete Systems P. 248

accessories P. 238

control units
accessories for control units
set of batteries for control units
expansion boards
software
receivers
transmitters
control devices

P. 230
P. 238
P. 238
P. 239
P. 240
P. 240
P. 241
P. 241

activation sensors automatic doors and security
signalling devices
safety devices - Photocells and accessories
safety devices - Sensitive edges
rubber profiles
solenoid locks
release systems

P. 242
P. 243
P. 243
P. 245
P. 245
P. 246
P. 246




| | | | |
|--|-------------------------------------|--|--|
|  | P125014 - SCS IO | | |
| | Serial Input Output expansion board | | |

Software

| | | | |
|--|--|---|--|
|  | P111510 - U-Base 2 PC |  | P111513 00002 - U-Sdk Light 2 new |
| | Management and programming software for Bft control units and receivers. Version for PC, Bluetooth connection | | U-Sdk is the innovative application that can make Bft automation systems compatible and easily integrated with a BMS network for the supervision of buildings. |
|  | P111514 00002 - U-Sdk Full 2 |  | P111513 00008 - U-Sdk Light 8 |
| | U-Sdk is the innovative application that can make Bft automation systems compatible and easily integrated with a BMS network for the supervision of buildings. | | U-Sdk is the innovative application that can make Bft automation systems compatible and easily integrated with a BMS network for the supervision of buildings. |
|  | P111514 00008 - U-Sdk Full 8 new |  | P111523 - U-BASE 2 ANDROID |
| | U-Sdk is the innovative application that can make Bft automation systems compatible and easily integrated with a BMS network for the supervision of buildings. | | BFT receiver and control unit management and programming software. Version for Android mobile device, Bluetooth connection |

Receivers

| | | | |
|--|---|---|---|
|  | D113808 00003 - CLONIX UNI AC U-LINK 230V |  | D113807 00002 - CLONIX 2E AC U-LINK 230 |
| | 433MHz external receiver with 3 outputs: 2 with NO contact and one NO/NC configurable. Compatible with U-LINK protocol (with 3 connection slots). Power supply 230V, 2048-position memory | | 433MHz external receiver with 2 outputs with NO contact. Compatible with U-LINK protocol (with 3 connection slots). Power supply 230V, 2048-position memory |
|  | D113718 00002 - CLONIX 4 RTE |  | D113674 00001 - CLONIX 2E |
| | External 4-channel 433 MHz rolling code receiver. Power relay outputs (16A 230v) | | External dual channel 433 MHz rolling code receiver. 128-position memory |
|  | D113674 00003 - CLONIX 2E 2048 |  | D113670 00002 - RTD 2048 |
| | Dual channel 433 MHz rolling code plug-in receiver. 2048-position memory | | Four-channel rolling code receiver with 2048 codes and built-in programming display. 230Vac power supply, radio command block programming |
|  | D111713 00001 - MOP |  | D111662 - CLONIX 2 |
| | Accessory for adding an output channel to RTD | | Dual channel 433 MHz rolling code plug-in receiver. 128-position memory |
|  | D111664 - CLONIX 2 2048 |  | D111305 - RO 2 |
| | Dual channel 433 MHz rolling code plug-in receiver. 2048-position memory | | Dual channel 30.875 MHz plug-in receiver. |
|  | D111050 - RE |  | D113746 00003 - GSM RECEIVER |
| | Wired connection board for two BFT plug-in receivers | | GSM receiver. Enables the operation of an automation system with a free phone call |
|  | D113632 - AEL 433 |  | D113631 - AEL 30.8 |
| | Antenna for 433 MHz radio remote control with 4 m cable | | Antenna for 30.875 MHz radio remote control with 4 m cable |

Transmitters

| | | | |
|--|--|--|--|
| | D111904 - Mitto B Rcb02 R1 Transmitter with 2 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A | | D111905 - MITTO B RCB02 R2 REPLAY Copyable transmitter 2 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A. |
| | N999542 - Mitto B Rcb02 R3 12V two-channel transmitter 433MHz rolling code. Pack of 100 items, numbered for block memorisation | | D111906 - Mitto B Rcb04 R1 Transmitter with 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A |
| | D111907 - MITTO B RCB04 R2 REPLAY Copyable transmitter 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A. | | N999543 - Mitto B Rcb04 R3 Transmitter 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A. Pack of 100pcs numbered for block memorisation. |
| | D111945 - MITTO B RCB04 R1 VINEYARD Transmitter 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A. Colour: Vineyard Red | | D111946 - MITTO B RCB04 R1 SUNRISE Transmitter 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A. Colour: Sunrise Yellow |
| | D111947 - MITTO B RCB04 R1 CLEAR ICE Transmitter 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A. Colour: Clear Ice White | | N999629 - MITTO B RCB04 R6 RAINBOW Pack of four MITTO 4 transmitters in the four BFT colours: vineyard red sunrise yellow clear ice white deep sea blue |
| | D111888 - Kleio B Rca02 R1 Transmitter with 2 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A | | D111890 - Kleio B Rca04 R1 Transmitter with 4 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A |
| | N999522 - CLIP B 00 R04 Wall mounting clip for KLEIO B RCA and MITTO B RCB remote controls. 30 unit pack | | N999521 - CLIP1 B 00 R03 Clip for hooking KLEIO B RCA and MITTO B RCB series remote controls to belt or sun visor. Supplied in pack of 30pcs |
| | P121024 - Q.BO TOUCH Wireless digital touchpad with 433MHz rolling code operation. Manages up to 10 channels and 100 codes. | | P121016 - RB ^{Ph}Out 4-channel wall-mounted radio control with rolling code |

Control devices

| | | | |
|--|--|--|---|
| | P121025 - Q.BO PAD Vandalproof outdoor digital button panel. Metal structure and s/steel buttons. Compatible with WIEGAND protocol, it ensures maximum system safety as it does not directly control gate opening. | | P121024 - Q.BO TOUCH Wireless digital touchpad with 433MHz rolling code operation. Manages up to 10 channels and 100 codes. |
| | P121023 - Q.BO KEY WM AV Vandalproof key selector with double contact, for outdoor use. Metal structure. Vandalproof key selector with metal structure. | | P121022 - Q.BO KEY WM Key selector for outdoor use with double contact. |
| | P903026 - PHP3 Pair of aluminium columns for Q.bo series selectors. Height 1038 mm | | P903027 - PHP4 Pair of aluminium columns of different heights, for Q.bo series selectors and DESME and THEA series photocells. Column for selector: height 1038 mm, column for photocells: height 552mm |



| | | | |
|--|---|---|--|
|  | P121016 - RB  |  | P903008 - CSC 50 |
| | 4-channel wall-mounted radio control with rolling code | | Aluminium column for photocell mod. CELLULA 50 and selector mod. INTRO |
|  | D121011 - LCM |  | D121611 - SPC |
| | Magnetic key reader. For column mounting - see mod. CLC | | External button panel with 2 start-stop buttons. |
|  | D121612 - SPC2 |  | D121619 - SPC3 |
| | External button panel with 2 open-close buttons. | | Open stop close button panel. |
|  | N733036 - MOX |  | P111274 - RME 1 BT |
| | External release system to be inserted in SIBOX safe | | 24Vac single channel metal object detector with installation base |
|  | D110926 00001 - SPIRA 2X1 |  | N574039 - BOX |
| | Magnetic loop 2 x 1 m | | Wall-mounted safe for steel cable release and electric control |
|  | P111001 00003 - RME 2 | | |
| | 230Vac dual channel metal object detector with installation base | | |

Activation sensors automatic doors and security

| | | | |
|--|---|---|--|
|  | P111662 - VIO-M |  | P111657 00003 - 4SAFE IR SAFETY SENSOR MONIT. SW/2MOD/900 |
| | Compact mono-directional activation sensor | | Monitored IR safety sensor for side-hung leaves, 2 modules, 900mm |
|  | P111657 00002 - 4SAFE IR SAFETY SENSOR MONIT. SW/2MOD/700 |  | P111657 00001 - 4SAFE IR SAFETY SENSOR MONIT. SW/1MOD/700 |
| | Monitored IR safety sensor for side-hung leaves, 2 modules, 700mm | | Monitored IR safety sensor for side-hung leaves, 1 module, 700mm |
|  | P111656 - VIO-ST |  | P111655 - IXIO-DT1 |
| | Infrared safety sensor, monitored | | Safety and mono-directional activation sensor, dual technology, monitored, programmable c.telecom. |
|  | P111654 - VIO-DT1 |  | P111653 - VIO-DT2 |
| | Safety and mono-directional activation sensor, dual technology, monitored | | Safety and bi-directional activation sensor, dual technology, monitored |
|  | P111652 - HR100-CT  |  | P111405 - REMOTE CONTROL |
| | Safety and mono-directional activation sensor, infrared, monitored | | Remote control for adjusting and setting FALCON, EAGLE ONE and ACTIVE8 |

| | | | |
|--|---|--|--|
| | <p>P111406 - SPOTFINDER</p> <p>IR curtain detector</p> | | <p>P111325 - RIP</p> <p>Multi-function active infrared radar, wide/narrow range</p> |
|--|---|--|--|

Signalling devices

| | | | |
|--|--|--|---|
| | <p>D113783 - IPNOS B LTB 24 R1</p> <p>Flashing light with LED technology and built-in receiver antenna. New design language with smoke-grey cover. Power supply 24 V ac/dc.</p> | | <p>D113748 00002 - RADIUS B LTA 230 R1</p> <p>Flashing light with incorporated antenna for motors with power supply 230 V.</p> |
| | <p>D113749 00002 - RADIUS B LTA 230 R2</p> <p>Flashing light without incorporated antenna for motors with power supply .</p> | | <p>D113748 00003 - RADIUS B LTA 24 R1</p> <p>Flashing light with incorporated antenna for motors with power supply 24 V.</p> |
| | <p>D113749 00003 - RADIUS B LTA 24 R2</p> <p>Flashing light without incorporated antenna for motors with power supply .</p> | | <p>P123026 - B 00 R01</p> <p>Metal guard for B LTA</p> |
| | <p>P123025 - B 00 R02</p> <p>Wall mounting for B LTA series flashing beacons</p> | | <p>D121458 - TRAFFIC LIGHT</p> <p>Traffic lights with two red/green lights</p> |
| | <p>D831081 - CMS</p> <p>Sign</p> | | |

Safety devices - Photocells and accessories

| | | | |
|--|--|--|--|
| | <p>P111714 - THEA A15 O.PF UNI</p> <p>Pair of universal photocells suitable for non-BFT automation systems, adjustable with integrated flashing light. Beam can be oriented 40° horizontally and 10° vertically. Synchronised infrared signal to avoid any possibility of accidental dazzling. Range 30 m. Power supply 24 V ac/dc. For external application.</p> | | <p>P111528 - THEA A15 O.PF</p> <p>Pair of adjustable photocells with integrated flashing light. Possibility of directing the beam 40° horizontally and 10° vertically. IR signal synchronised to prevent any risk of blinding. Range 30 m. Power supply 24 V ac/dc. For external application.</p> |
| | <p>P111526 - DESME A15</p> <p>Pair of self-aligning photocells. Range 30 m. Power supply 24 V ac/dc.</p> | | <p>P111527 - DESME A15 O</p> <p>Pair of photocells adjustable 40° horizontally and 10° vertically. IR signal synchronised to prevent any risk of blinding. Range 30 m. Power supply 24 V ac/dc.</p> |
| | <p>P111536 - AKTA A30</p> <p>Pair of photocells adjustable 180° horizontally and 20° vertically. Range 30 m. Power supply 24 V ac/dc.</p> | | <p>P111537 - ERIS A30</p> <p>Pair of wireless photocells with possibility of management of an active infrared or resistive safety edge adding STR and BIR C or BAR C profiles. Possibility of adjusting the beam 180° horizontally and vertically 20°. Range 30 m. Power supply 24 V ac/dc.</p> |
| | <p>P903018 - PHP</p> <p>Pair of aluminium posts for THEA/DESME series photocells Height 522 mm</p> | | <p>P903019 - PHP2</p> <p>Pair of double aluminium posts for THEA/DESME series photocells. Height 1038 mm</p> |



| | | | |
|--|--|--|---|
| | <p>P903021 - PHP ADA CC</p> <p>Pair of adapters for the installation of THEA/DESME photocells on CC posts</p> | | <p>P903022 - PHP BI</p> <p>Dual-face adapter for THEA/DESME photocells</p> |
| | <p>P903023 - PHP BA1</p> <p>Support for mounting THEA/DESME photocells on Giotto, Moovi and Michelangelo enclosures</p> | | <p>P903025 - PHP ADA</p> <p>Pair of adapters for the installation of AKTA photocells on PHP posts</p> |
| | <p>P903024 - ACV20</p> <p>Vandal-proof protection for DESME photocells</p> | | <p>P111538 - ACV30</p> <p>Vandal-proof protection for AKTA photocells</p> |
| | <p>P903020 - APL</p> <p>Pair of foundation plates for PHP posts</p> | | <p>P903027 - PHP4</p> <p>Pair of aluminum columns of different heights, for Q.bo series selectors and DESME and THEA series photocells. Column for selector: height 1038 mm, column for photocells: height 552mm</p> |
| | <p>P111081 - PRO 130 </p> <p>Anodised aluminium vandal-proof guard for CELLULA 130</p> | | <p>P903005 - CC130 </p> <p>Pair of aluminium posts for CELLULA 130 photocells</p> |
| | <p>P903006 - CC130/2 </p> <p>Pair of aluminium posts with double fitting for CELLULA 130 photocells</p> | | <p>P903007 - CSC 130 </p> <p>Aluminium post for CELLULA 130 photocell and INTRO selector, plus CC130 post</p> |
| | <p>P111272 - CELLULA 50</p> <p>Pair of built-in adjustable photocells (range 30 m) Power supply 24V ac</p> | | <p>P903004 - CC50</p> <p>Pair of aluminium posts for CELLULA 50 and CELLULA RFL photocells</p> |
| | <p>P903008 - CSC 50</p> <p>Aluminium column for photocell mod. CELLULA 50 and selector mod. INTRO</p> | | <p>P111460 - KIT CELLULA 180 AT</p> <p>KIT CELLULA 180 + DCW COVER</p> |
| | <p>N999465 - DCW BAT</p> <p>Pack of 12 batteries for photocell safety edge, compatible with DCW, TANGO, ERIS A30</p> | | <p>P111391 - CELLULA RFL</p> <p>Reflective photocell for external application (range 12 m) Power supply 24V ac/dc (requires S RFLP P111409)</p> |
| | <p>P111399 - IT23</p> <p>Connection interface for CELLULA RFL in accordance with EN12453 Standard</p> | | <p>P111409 - S RFLP</p> <p>Reflector and support for wall mounting and mounting on CC post for CELLULA RFL</p> |
| | <p>P903013 - CC RFL</p> <p>CELLULA RFL and S RFLP mounting support on CC posts</p> | | <p>P903014 - CM RFL</p> <p>CELLULA RFL wall mounting support</p> |
| | <p>D221573 - CCI</p> <p>Recessed container for CELLULA 50 and INTRO.</p> | | |

Safety devices - Sensitive edges

| | | | |
|--|--|--|---|
| | <p>P111537 - ERIS A30</p> <p>Pair of wireless photocells with possibility of management of an active infrared or resistive safety edge adding STR and BIR C or BAR C profiles. Possibility of adjusting the beam 180 ° horizontally and vertically 20 °. Range 30 m. Power supply 24 V ac/dc.</p> | | <p>N190106 - STR</p> <p>Pair of infrared STR sensors for ERIS A30</p> |
| | <p>N999465 - DCW BAT</p> <p>Pack of 12 batteries for DCW photocell safety edge</p> | | <p>P111401 00001 - VENTIMIGLIA NS</p> <p>Infrared device for BIR C or BAR C safety edges (conforms to EN 12978 Standard)</p> |
| | <p>D141160 - FLEXY 6</p> <p>6x0.5 sq mm extensible spiral cable for industrial sectional doors. Max. extension 6 m</p> | | |

Rubber profiles

| | | | |
|--|---|--|---|
| | <p>D221074 - TB</p> <p>Plug for BIR C</p> | | <p>N190104 - BIR C</p> <p>Rubber safety edge (H 30 mm), price per m</p> |
| | <p>N999025 - TA</p> <p>TA TAPPI BAR</p> | | <p>N190041 - CSP 25</p> <p>Rubber shock absorber profile length 2500 mm</p> |
| | <p>N190040 - CSP 20</p> <p>Rubber shock absorber profile length 2000 mm</p> | | <p>N190039 - CSP 10</p> <p>Rubber shock absorber profile length 1000 mm</p> |
| | <p>P111056 - CM5000</p> <p>Mechanical safety edge, length 5 m</p> | | <p>P111055 - CM4000</p> <p>Mechanical safety edge, length 4 m</p> |
| | <p>P111054 - CM3000</p> <p>Mechanical safety edge, length 3 m</p> | | <p>P111053 - CM2000</p> <p>Mechanical safety edge, length 2 m</p> |
| | <p>P111052 - CM1700</p> <p>Mechanical safety edge, length 1.7 m</p> | | <p>P111051 - CM1500</p> <p>Mechanical safety edge, length 1.5 m</p> |
| | <p>P111050 - CM1000</p> <p>Mechanical safety edge, length 1 m</p> | | <p>P111451 00006 - BAR C BA 6</p> <p>Double profile rubber safety edge with lip seals (L 6000 x H 60 mm)</p> |
| | <p>P111451 00004 - BAR C BA 4</p> <p>Double profile rubber safety edge with lip seals (L 4000 x H 60 mm)</p> | | <p>P111451 00002 - BAR C BA 2</p> <p>Double profile rubber safety edge with lip seals (L 2000 x H 60 mm)</p> |



| | | | |
|--|--|--|--|
| | P111450 00006 - BAR C 6 Double profile rubber safety edge (L 6000 x H 60 mm) | | P111450 00004 - BAR C 4 Double profile rubber safety edge (L 4000 x H 60 mm) |
| | P111450 00002 - BAR C 2 Double profile rubber safety edge (L 2000 x H 60 mm) | | |

Solenoid locks

| | | | |
|--|---|--|---|
| | P123001 00001 - EBP 230Vac electric drop lock | | P123001 00013 - EBP 24 24Vac solenoid lock, with 230/24V transformer installable in control panel |
| | P123006 00001 - EBPE 52 230Vac solenoid lock with zero stop resistance, also with release from outside for gates of max thickness 50 mm | | P123008 00001 - EBPE 75 230Vac solenoid lock with zero stop resistance, also with release from outside for gates of max thickness 75 mm |
| | D121016 - ECB DX Right-hand horizontal solenoid lock, 12-24V | | D121017 - ECB SX Left-hand horizontal solenoid lock, 12-24V |
| | D121018 - ECB VERTICALE Vertical solenoid lock, 12-24V | | P123006 00013 - EBPE 52 24V EBPE 52 24V with transformer |
| | P123001 00004 - EBP 120 Drop electric lock + transf. 24/120V 60Hz | | P123001 00019 - EBP24 120 Drop electric lock + transf. 24/120V 60Hz |

Release systems

| | | | |
|--|--|--|--|
| | N733502 - SCP Release for ELI 250 and SUB BT with personal key. | | N733392 - SCC Release for ELI 250N and SUB BT with lever key. |
| | N733189 - SCT Release for ELI 250 and SUB BT with personalized key. | | N574039 - BOX Wall-mounted safe for steel cable release and electric control |
| | N574005 - SIBOX Empty wall-mounted safe for external release and control keypad Dimensions 179.5 x 122 x 92 mm | | N733036 - MOX External release system to be inserted in SIBOX safe |

| | | | |
|--|--|--|--|
| | <p>D610256 - CLS/82</p> <p>Triangular release key for SUB operators l=82mm</p> | | <p>D610180 - CLS</p> <p>Triangular release key l=52mm</p> |
| | <p>P115003 - ST</p> <p>Automatic bolt release for sectional doors</p> | | <p>N733020 - SEB</p> <p>External key release for BERMA, FORB, IGEA LB and IGEA LB BTI</p> |
| | <p>N733069 - SET/S</p> <p>External release for insulated sectional and overhead doors of thickness up to 50 mm. SET/S</p> | | <p>N733422 - RCAL</p> <p>Lever release for ARGO with steel cable, length 7 m</p> |
| | <p>D531097 00001 - CRC SPARE KEY</p> <p>CRC SPARE KEY</p> | | |